



Visionarie Fixture LED Retrofit Light

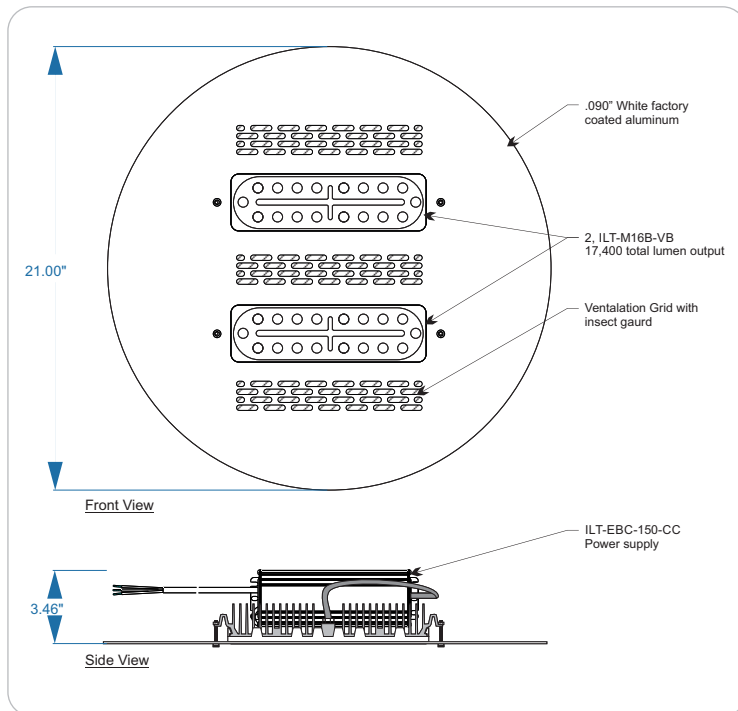

For additional information call: Joe Reis at 978-818-6180 ext 214

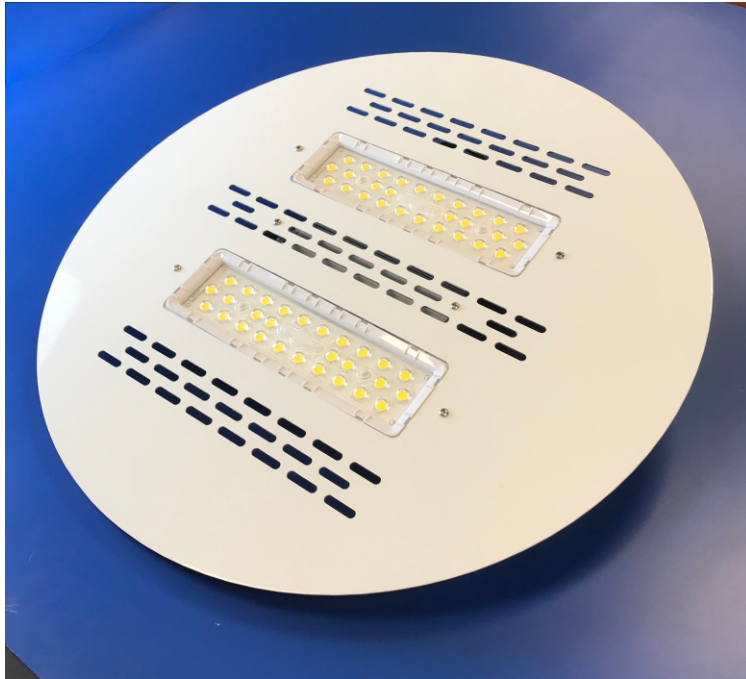

ILT's LED Retrofit for the Visionarie Monterey Size 2 Architectural

Convert your Visionarie Monterey fixture from HID to LED with ILT's retrofit kit. Eliminate costly relamping and reduce power consumption with a long-lasting, efficient LED system. The ILT Visionarie Retro-fit Kit installs easily, and without removing the fixture from its location. The retrofit kit delivers 17,400 lumens, with a 145 lpw efficacy. The kit is IP65 rated and comes with a 5 year warranty.

ILTCL-VLM2-5K

Input Power (W)	120W
Input Voltage	100-277V
Lumens Delivered (lm)	17400
Efficacy (lm/W)	145
CRI	80<
Color Temperature	5000K
Power Factor	0.9
THD	<12%
Lens	Poly w/ 90 degree optics
Housing	Extruded Aluminum
Finish	White
Environment	IP65
Operating Temperature	-40° F- 122° F
Warranty	5 years



InternationalLight
TECHNOLOGIES

10 Technology Drive Peabody, MA 01960
ph 978-818-6180, fax 978-818-6181 www.intl-lighttech.com

Visionarie Fixture LED Retrofit Light



Installation Instruction LED Retrofit Light: ILTCL-VLM2-5K



Fig 1. Remove entire flange and glass lens hanger.



Fig 2. Remove lens clips.



Fig 3. Remove glass lens.



Fig 4. Remove rubber gasket from glass lens.

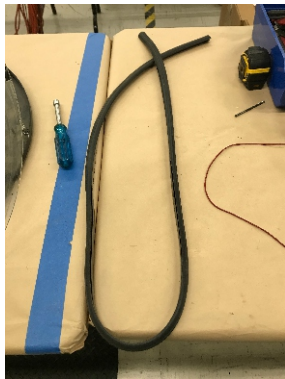


Fig 5. Clean rubber gasket with soap and water.

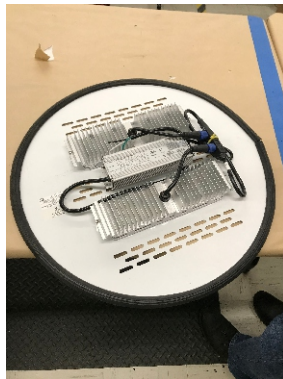


Fig 6. Install rubber gasket on retrofit fixture. Ribbed side to be on inside.



Fig 7. Line up rubber gasket seam with first lens clip.

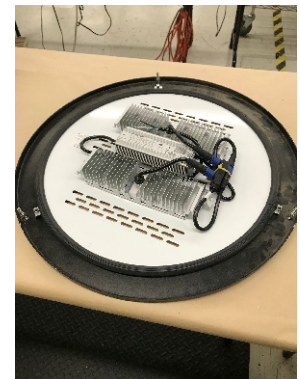


Fig 8. Tighten all lens clips.



Fig 9. AC feed to be wired in provided work box



InternationalLight
TECHNOLOGIES

10 Technology Drive Peabody, MA 01960
ph 978-818-6180, fax 978-818-6181 www.intl-lighttech.com

For additional information call:
978-818-6180 ext 214