



ILT Horizontal CaseLight

LED-Based HORIZONTAL Refrigerated Food Display Case Lighting System

Make Your Prepared Foods POP With Horizontal CaseLight™ LED Modules:

- ◆ Easily Replace Food Display Case Fluorescent Lights
- ◆ One CaseLight Module Replaces 2 Fluorescent Bulbs - Lower Energy Bills and No Burned Out Bulbs!
- ◆ Adjustable Mounting Brackets for Optimal Product Illumination
- ◆ Long Fixture Life - YEARS vs. Weeks/Months
- ◆ Low Maintenance - 5 Year Warranty on CaseLight Modules & Power Supplies
- ◆ DLC Listed - Eligible for ALL Utility Rebates
- ◆ CaseLight Modules Manufactured in the USA

Following on the success of ILT's Vertical CaseLight modules for refrigerated/freezer display cases, ILT's Horizontal CaseLight module is designed to replace existing fluorescent light fixtures in horizontal food display cases (reach-in/multi-deck dairy, produce & prepared foods) easily and cost-effectively.


LED-based Horizontal CaseLight modules provide all of the advantages of LED-based lighting including much longer life (greater than 50,000 hours), much lower energy consumption and much better lighting characteristics – brighter light focused on the merchandise. Plus all of ILT's CaseLight modules are DLC listed qualifying for maximum utility rebates.

45-Plus Years of ILT Lighting Experience Goes Into Every CaseLight!

ILT INNOVATIONS

Part Number	Description	Color Temp. (K)	Lumens	Energy (Watts)	CRI	Recommended Applications
ILT48-BAO-W35LH	Horizontal CaseLight, 48", Brite Anodize, Left Configuration	3500	1714	22.2	85	Fresh Meats
ILT48-BAO-W35RH	Horizontal CaseLight, 48", Brite Anodize, Right Configuration	3500	1714	22.2	85	Fresh Meats
ILT48-BAO-W40LH	Horizontal CaseLight, 48", Brite Anodize, Left Configuration	4000	1714	22.2	85	Produce, Dairy
ILT48-BAO-W40RH	Horizontal CaseLight, 48", Brite Anodize, Right Configuration	4000	1714	22.2	85	Produce, Dairy
ILT48-BAO-W50LH	Horizontal CaseLight, 48", Brite Anodize, Left Configuration	5000	2000	22.2	85	Frozen Food
ILT48-BAO-W50RH	Horizontal CaseLight, 48", Brite Anodize, Right Configuration	5000	2000	22.2	85	Frozen Food
ILT70-BAO-W35LH	Horizontal CaseLight, 70", Brite Anodize, Left Configuration	3500	2541	31.3	85	Fresh Meats
ILT70-BAO-W35RH	Horizontal CaseLight, 70", Brite Anodize, Right Configuration	3500	2541	31.3	85	Fresh Meats
ILT70-BAO-W40LH	Horizontal CaseLight, 70", Brite Anodize, Left Configuration	4000	2541	31.3	85	Produce, Dairy
ILT70-BAO-W40RH	Horizontal CaseLight, 70", Brite Anodize, Right Configuration	4000	2541	31.3	85	Produce, Dairy
ILT70-BAO-W50LH	Horizontal CaseLight, 70", Brite Anodize, Left Configuration	5000	3000	31.3	85	Frozen Food
ILT70-BAO-W50RH	Horizontal CaseLight, 70", Brite Anodize, Right Configuration	5000	3000	31.3	85	Frozen Food

ILT-CEN-60-24	60 Watt, UL Class 2 Power Supply 100-277 VAC, 24VDC output	Powers up to 2 70" units
ILT-LPF-40-24	40 Watt, UL Class 2 Power Supply 100-277 VAC, 24VDC output	Powers up to 2 48" units
ILT-L24V100UNVA	100 Watt, UL Class 2 Power Supply 120-277 VAC, 24VDC output	Powers up to 3 70" units or 4 48" units

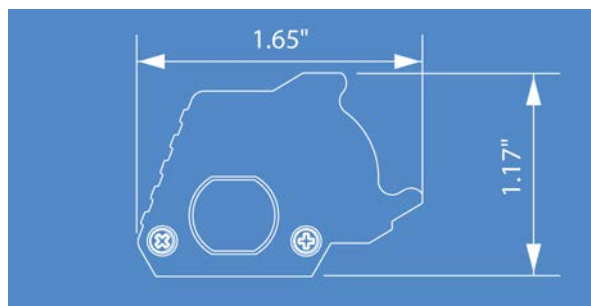

InternationalLight
TECHNOLOGIES

ISO 9001 / ISO/IEC 17025

10 Technology Drive, Peabody, MA 01960

978-818-6180 978-818-6181 fax

www.intl-lighttech.com

International Light Technologies