


APPLICATION:

- Back lighting panel
- Edge lighting for a variety of objects
- Halo- Illumination
- Cove lighting
- Indirect accent decorative lighting in commercial and residential applications
- Signage applications
- Ideal for architectural lighting

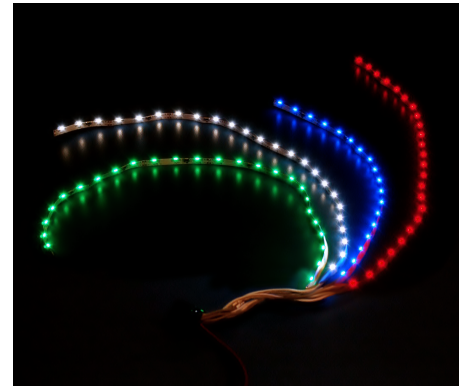

GTL-FLEX-SV60-W

Feature:

- Makes use of 0.75mm height SMD SIDE LIGHT LED which can be used in small areas
- 5mm wide PCB great for small applications
- Flexible circuit board with 3M self-adhesive backing for easy install
- Available in 5 meter and 10 meter reels
- Available in warm whites of 4800K and 3000K

Specifications

Part No.	Operating Voltage	Current (mA)	Power dissipation (W)	Emitting color	Viewing Angle	Luminous flux	LED quantity (pc)	Measure L*W (mm)	Quantity on 60 watt PS
	(V)					(lm)			
GTL-FLEX-SV60-R	12	400	6.35	Red	120	42	60	1000*5	30ft or 9.14m
GTL-FLEX-SV60-O	12	400	6.35	Orange	120	42	60	1000*5	30ft or 9.14m
GTL-FLEX-SV60-Y	12	400	6.35	Yellow	120	42	60	1000*5	30ft or 9.14m
GTL-FLEX-SV60-B	12	400	6.35	Blue	120	30	60	1000*5	30ft or 9.14m
GTL-FLEX-SV60-G	12	400	6.35	Green	120	72	60	1000*5	30ft or 9.14m
GTL-FLEX-SV60-W-6000k	12	400	6.35	White	120	84	60	1000*5	30ft or 9.14m

GTL-FLEX-SV60 Mechanical Detail

