

ILT CanopyLight-11KP and 13KP LED Canopy Light Retrofit Kits



CanopyLight-11KP™ & 13KP™ Features:

- ◆ CanopyLight-11KP Output = 11,150 Lumens
CanopyLight-13KP Output = 12,800 Lumens
- ◆ DLC "Premium" Qualified
- ◆ CanopyLight-11KP Meets Rebate Qualifications For Replacing 320W Fixtures; CanopyLight-13KP Replaces 400W fixtures (Greater Than 70% Energy Savings!)
- ◆ Retrofit Gas Station Fuel Pump Under-Canopy Light Fixtures - "Scottsdale" to "Dakota" (2' x 2' Drop Boxes)*
- ◆ Fast Installation & No Leaks - Existing Canopy Roof Seals Not Disturbed
- ◆ Focused Light – Lights Gas Pumps & Fueling Areas
- ◆ Completely Eliminates Existing Inefficient Light Fixture Lens
- ◆ 5 Year Warranty on Fixture and Power Supply
- ◆ Power Supply - Highly Efficient (up to 91%) and Reliable (5 Year Warranty)




The ILT new, improved ILT CanopyLight-11KP & 13KP LED Retrofit Kits are now even more efficient! Greater than 108 Lumens/W and greater than 15% reduction in power for 13KP from the previous model – down to 115W from 135W.

Retrofit existing fixtures without disrupting canopy-to-fixture seals eliminating potential roof leaks common with other canopy light retrofit procedures. And, because install time is as low as 15 minutes, **CanopyLight-11KP & 13KP have one of the lowest installed costs on the market!**



CanopyLight-11KP, 13KP Specifications:

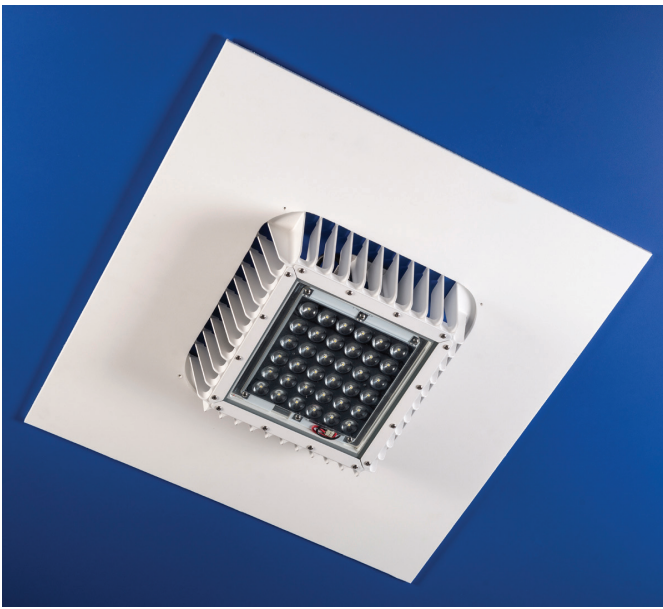

CanopyLight Fixture in Adapter Plate

CanopyLight Part Numbers

Fixture Being Replaced	ILT CanopyLight-11KP or 13KP Fixture	Adapter Plate (Part Number)
LSI Scottsdale* - Drop Lens	ILTCPY-W50C11KP or 13KP	Not Needed
LSI Scottsdale* - Flushmount	ILTCPY-W50C11KP or 13KP	Not Needed
LSI Dakota* - Drop Lens	ILTCPY-W50C11KP or 13KP	FLANGE-KIT215P
LSI Dakota* - Flushmount	ILTCPY-W50C11KP or 13KP	FLANGE-KIT215A
Whiteway Riviera**	ILTCPY-W50C11KP or 13KP	FLANGE-KIT215P
Whiteway Vision**	ILTCPY-W50C11KP or 13KP	FLANGE-KIT215A
2X2 Drop Box - Drop Lens	ILTCPY-W50C11KP or 13KP	FLANGE-KIT215P
2X2 Drop Box - Flushmount	ILTCPY-W50C11KP or 13KP	FLANGE-KIT215A

Optical Specs	CanopyLight-11KP	CanopyLight-13KP
LED Spec & Quantity	36X3W (White) LEDs	36X3W (White) LEDs
LED Color Temp	5000K	5000K
Luminaire Efficiency	> 108.3 Lumens/W	> 110.8 Lumens/W
LED Efficiency	135 Lumens/W	135 Lumens/W
Initial Delivered Lumen Tj = 25°C	11,150 Lumens with Improved Light Distribution	12,790 Lumens with Improved Light Distribution
Illuminance Distribution at 10 ft	54.3 FC (Single Unit)	57.8 FC (Single Unit)
Color Rendering Index	Ra > 70	Ra > 70
Beam Angle	110°	110°
Electrical Specs	CanopyLight-11KP	CanopyLight-13KP
Input Voltage & Frequency	AC 100-277V, 50-60Hz	AC 100-277V, 50-60Hz
Power Factor	> 0.95 @ 277 VAC	> 0.91 @ 277 VAC
Input Current	< 0.88A (120V)	< 0.97A (120V)
Total Power Consumption	< 103W	< 115.4W
Power Supply Efficiency	> 90%	> 90%
Other Specs	CanopyLight-11KP	CanopyLight-13KP
Operating Temp. & Humidity	-30 to 50°C / 10-90% RH	-30 to 50°C / 10-90% RH
Storage Temp.	-40~85°C	-40~85°C
Dimensions	Minimum: L 12.76" X W 12.76" X D 3.6" Adapter Plate: L 21.5" X W 21.5" D 0.25"	Minimum: L 12.76" X W 12.76" X D 3.6" Adapter Plate: L 21.5" X W 21.5" D 0.25"
Net Weight	9.2 lbs.	9.2 lbs.
IP Rating	IP65	IP65
Lifespan	L70 > 50,000 Hrs. L90 > 36,000 Hrs.	L70 > 50,000 Hrs. L90 > 36,000 Hrs.
Warranty	5 Years	5 Years



InternationalLight
TECHNOLOGIES

ISO 9001 / ISO/IEC 17025

10 Technology Drive, Peabody, MA 01960

978-818-6180 978-818-6181 fax

www.intl-lighttech.com

* Scottsdale, Richmond & Dakota are Registered Trademarks of LSI Industries.

** Whiteway Riviera & Vision are Trademarks of Hubbell Lighting, Inc.