


**APPLICATION:**

- Back lighting panel
- Edge lighting for a variety of objects
- Cove lighting
- Indirect accent decorative lighting in commercial and residential applications
- Signage applications
- Ideal for architectural and landscape lighting

**Feature:**

- Makes use of 2828 Sharp SMD LED
- .5” wide PCB for narrow applications
- Flexible circuit board with 3M self-adhesive backing for easy install
- Available in 15 foot reels
- Available in four white color temperatures.

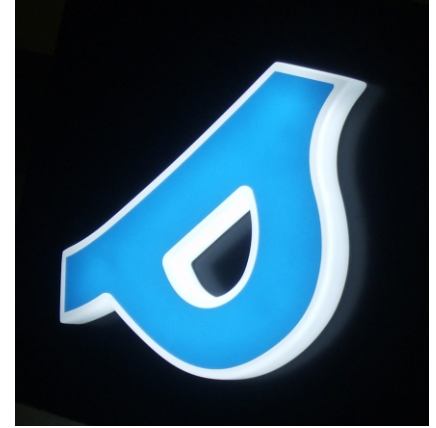

GTL-FLEX-38-W-6500K

**Specifications**

Part No.	Operating Voltage	Power dissipation / ft	Emitting color	Peak wavelength	CRI (Color rendering index)	Viewing Angle	Luminous flux / ft		LED quantity / ft	Measure
	(V)	(W)		(nm)			(lm)		(pc)	L*W
							min	max		(in)
GTL-FLEX-38-W-6500k	12	5.25	White	6500k	85	160	400	426	12	12" x .314"
GTL-FLEX-38-W-5000k	12	5.25	White	5000k	85	160	370	400	12	12" x .314"
GTL-FLEX-38-W-4000k	12	5.25	White	4000k	87	160	370	400	12	12" x .314"
GTL-FLEX-38-W-3500k	12	5.25	White	3500k	89	160	354	376	12	12" x .314"

**GTL-FLEX-38-W Mechanical Detail**

